




# Video Laryngoscope

High Definition Video Intubation



High-definition monitor for airway management

# Disposable Blade Videolaryngoscope (S-VL-01)

Designed for high-load clinical environments where cross-infection prevention is a priority.

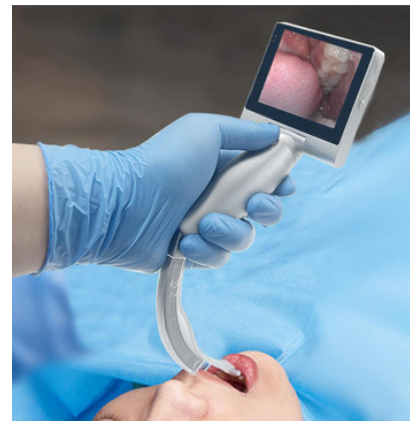

- **Applications:** Anaesthesia, ICU, Emergency, ENT and Respiratory.
- **Safety:** Medical-grade polycarbonate (PC) blades with ISO 10993 certified biocompatibility.
- **Blade Versatility:** MAC 1 to MAC 4 for patients from infants to large adults and D-Blade: Special for difficult airway.
- **Hygiene:** The handle and screen are cleaned with 75% alcohol and the blade is discarded after use.

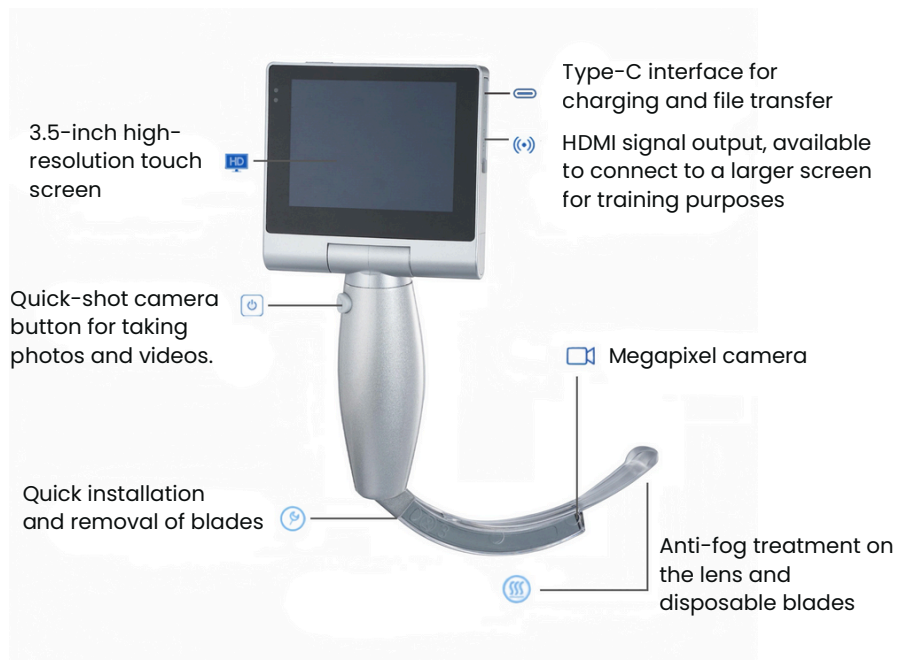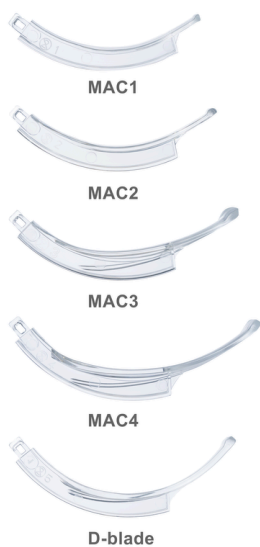


## Disposable Blades Specifications (S-VL-01)

Reference	Specification	Application	Intubation ID	Length (mm)
VLB01	MAC 1	Infant	2.5-4.5	102
VLB02	MAC 2	Children	4.5-6.0	110
VLB03	MAC 3	Adult	6.0-9.0	122
VLB04	MAC 4	Large adult	7.5-10.0	133
VLB05	D-Blade	Difficult airway	6.0-10.0	122


Sterilization: Clean the screen and handle with 75% alcohol and discard the single-use blade.

# Reusable Blades Videolaryngoscope (S-VL-R)

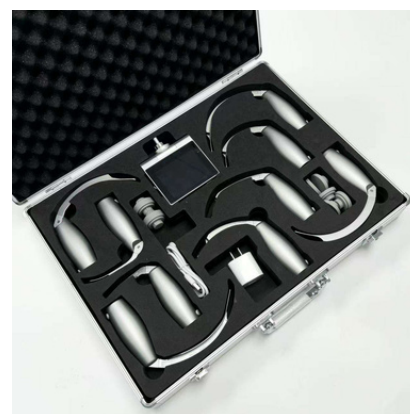

A robust and sustainable solution for advanced airway management.

- **Safety:** Ergonomic metal frame and blades with IPX7 waterproof design.
- **Sterilisation:** Blades must be immersed in CIDEX™ OPA solution for 10 minutes.
- **Versatility:** Includes options from MIL 0 (neonates) to D-Blade (L) for patients with obesity or difficult airways

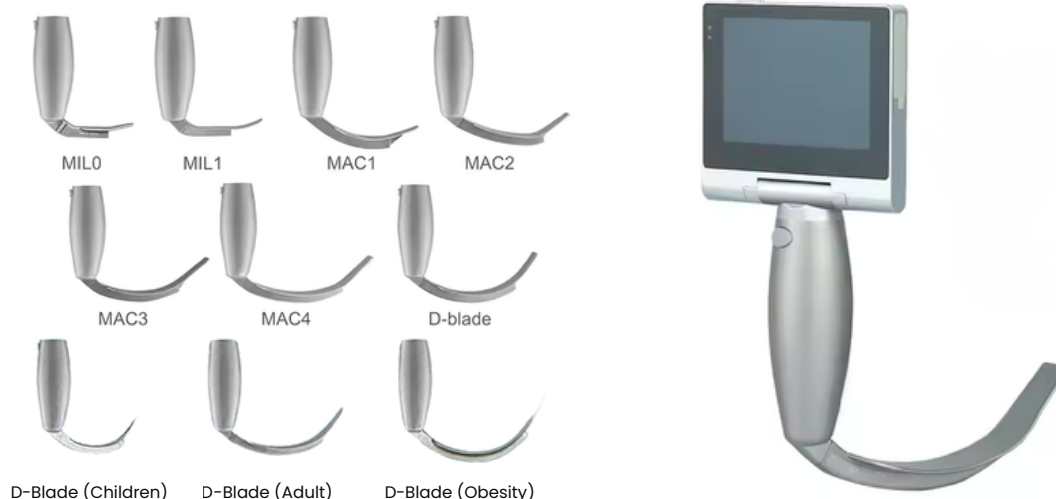

## Reusable Blades Specifications (S-VL-R)

Reference	Specification	Application	Intubation ID	Length (mm)
RH0	MIL 0	Neonates	2.5-3.0	65
RH01	MIL 1	Infant	2.5-4.0	77
RH02	MAC 1	Infant	2.5-4.0	100
RH03	MAC 2	Children	4.0-5.0	108
RH04	MAC 3	Adults	5.0-7.0	122
RH05	MAC 4	Large adult	6.0-10.0	135
RH06	D-Blade	Difficult airway (Adults)	5.0-7.0	128
RH07	D-Blade (S)	Difficult airway (Children)	2.5-4.5	90
RH08	D-Blade (L)	Difficult airway (Obesity)	6.0-10.0	136

Sterilization: Immerse in CIDEX™ OPA solution (10 minutes).

# Reusable Video Intubation Stylet (S-RVL)

Flexible or semi-rigid device with integrated camera to guide intubation in complex cases.

- **Sustainability:** High-durability reusable system that optimises operating costs.
- **Safety:** Ergonomic metal frame and waterproof design with IPX7 protection.
- **Sterilisation:** Immerse in CIDEX™ OPA solution (10 minutes)




## Intubation Stylet Specifications (S-RVL)

Reference	Application	Specification	Intubation ID	Length (mm)	Resolution
VSH01	Adults	Malleable	≥ 5.0	4.5 mm	1280 × 720
VSH02	Adults	Semi-rigid	≥ 5.0	4.5 mm	1280 × 720
VSH03	Children/Adults	Malleable	≥ 4.0	3.7 mm	1280 × 720
VSH04	Children/Adults	Semi-rigid	≥ 4.0	3.7 mm	1280 × 720
VSH05	Neonates	Malleable	≥ 2.5	2.0 mm	400 × 400
VSH06	Neonates	Semi-rigid	≥ 2.5	2.0 mm	400 × 400

Sterilization: Immerse in CIDEX™ OPA solution (10 minutes).

# Mobile Integral Solution for Airway Management

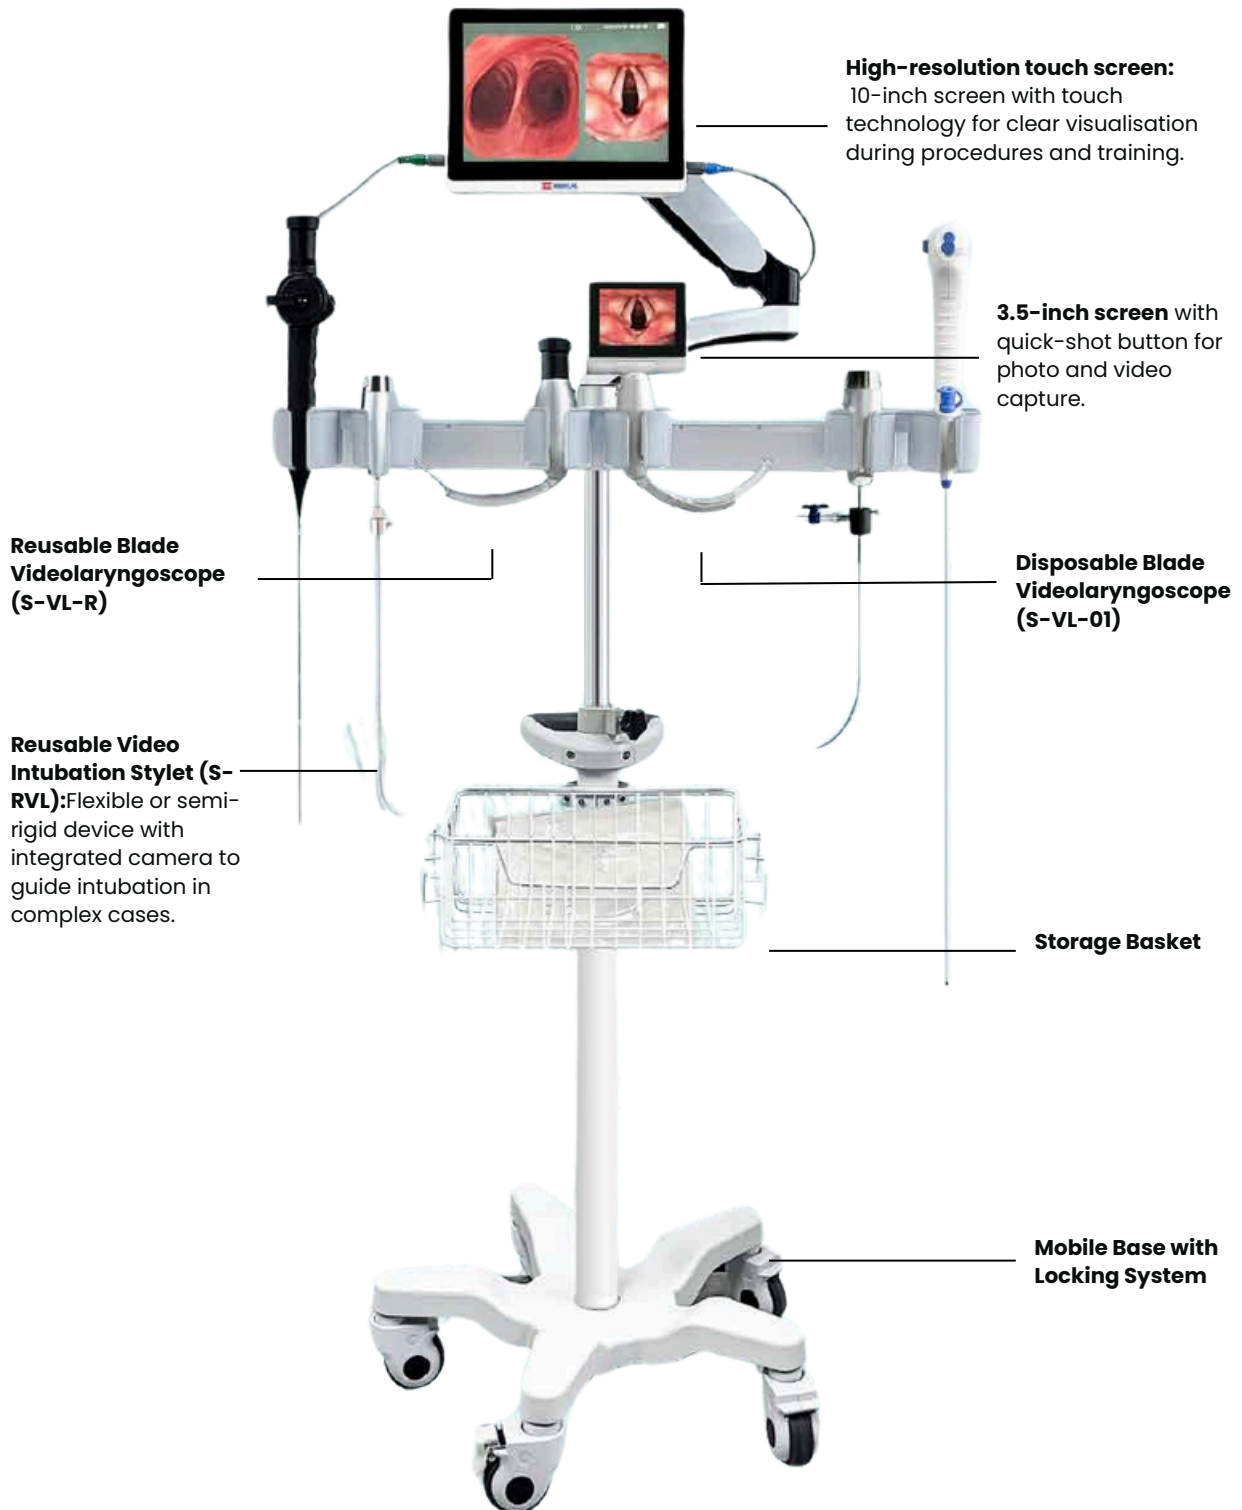

# High-Definition medical display

Compatible with the range of disposable blades, reusable blades, and video stylet.

- **Ergonomic and Durable Design:** Anti-glare technology and high-resistance frame for demanding clinical use.
- **Hygiene:** Quick and easy cleaning with 75% alcohol.
- **Advanced Data Management:** Real-time photo and video capture for clinical documentation and teaching purposes.
- **Autonomy:** Equipped with a long-lasting lithium battery, ideal for emergency departments and operating theatres.



**Display with Reusable Blade Videolaryngoscope (S-VL-R))**



**Display with Disposable Blade Videolaryngoscope (S-VL-01)**



# High-Definition medical display



## Medical Screen Specifications

Category	Parameter	Detail / Model
<b>HOST</b>	Screen size	3.5 / 10 inches
	Screen type	Touch screen
	Resolution	640 x 480 / 1280 x 800
	Video refresh	30 fps / 60 fps
	Aspect ratio	4:3
	Illumination	LED
	Rotation	U/D 150° e L/R 270°
<b>FUNCTIONS</b>	Operations	Photo, Video, Review, Audio, Replay, Time adjustment
<b>CAMERA</b>	Resolution	1280 x 720 p
	FOV (Field of View)	70°
	Illuminance	≥ 800 LUX
<b>BATTERY</b>	Type	Rechargeable lithium battery
	Duration	200 minutes
	Voltage	3,7V / 12V
	Capacity	2000mAh / 4000mAh
	Cycle Life	≥ 500 times
	Charging time	≥ 3 hours
<b>OUTPUTS</b>	Data	Type-C port
	Format	JPG/MOV
<b>HDMI OUTPUTS</b>	Video output	HDMI for real-time transmission



CAT VIDEOLARYNGOSCOPE IES MEDICAL EN\_02

## Contact:

IES MEDICAL® - International Emergency Services  
Bizkaia Science and Technology Park, Ibaizabal bidea, 500  
48160 Derio, Bizkaia, Spain

T. +34 944 008 847  
comercial@iesmedical.es  
[www.iesmedical.es](http://www.iesmedical.es)

**IESMEDICAL**  
Innovation for better care